


SAB-profiel adviseert bij de toepassing van dakbeplating in buitencondities:

- Een minimale dakhelling van 10 graden aan te houden.
- Een coatingsysteem met een laagdikte van minimaal 35 µm.




SAB 18/988

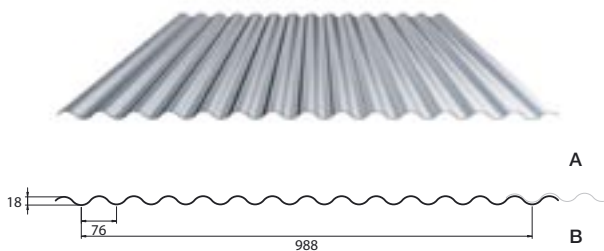


S	ALU	RVS		
Staal		Aluminium		
mm	kg/m ²	mm	kg/m ²	
0,63	6,26	0,70	2,39	
0,70	6,95	0,80	2,73	
0,75	7,45	1,00	3,42	
0,88	8,74			
1,00	9,93			
Aanbevolen maximale lengte: 12 m				

SAB 27/1000

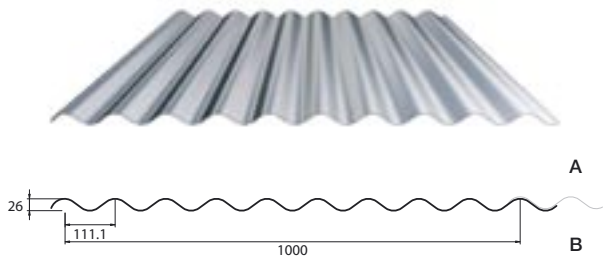


S	ALU	RVS		
Staal		Aluminium		
mm	kg/m ²	mm	kg/m ²	
0,63	6,30	0,70	2,41	
0,70	7,00	0,80	2,75	
0,75	7,50	1,00	3,44	
0,88	8,80			
1,00	10,00			
Aanbevolen maximale lengte: 12 m				

SAB 42/960

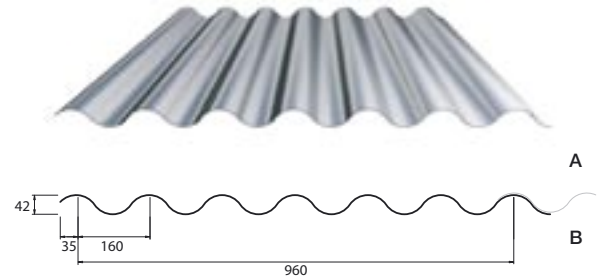

S	ALU	RVS		
Staal		Aluminium		
mm	kg/m ²	mm	kg/m ²	
0,63	6,55	0,70	2,51	
0,70	7,29	0,80	2,87	
0,75	7,81	1,00	3,58	
0,88	9,16			
1,00	10,40			
Aanbevolen maximale lengte: 12 m				


SAB 19KD/1050

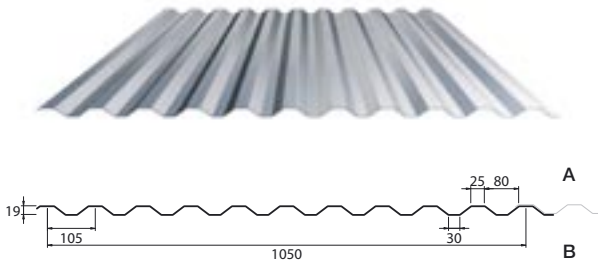

Staal		Aluminium	
mm	kg/m ²	mm	kg/m ²
0,63	5,88	0,70	2,33
0,70	6,53	0,80	2,66
0,75	7,00	1,00	3,33
0,88	8,21		
1,00	9,34		

Aanbevolen maximale lengte: 12 m


SAB 30KD/1050

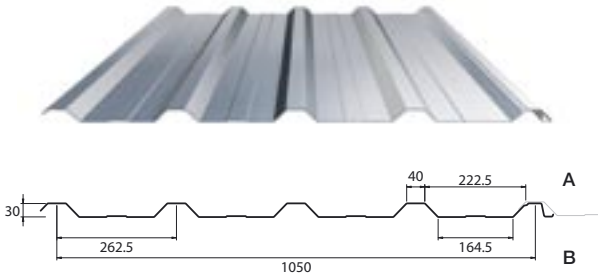

Staal		Aluminium	
mm	kg/m ²	mm	kg/m ²
0,63	5,88	0,70	2,33
0,70	6,53	0,80	2,66
0,75	7,00	1,00	3,33
0,88	8,21		
1,00	9,34		

Aanbevolen maximale lengte: 12 m


SAB 45KD/1000

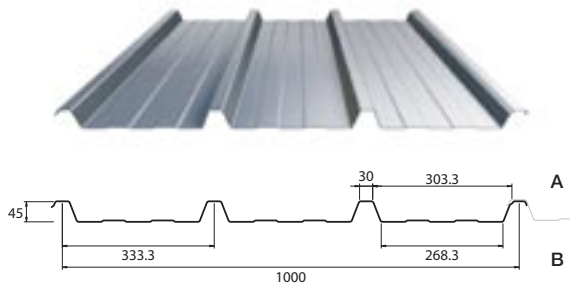

Staal		Aluminium	
mm	kg/m ²	mm	kg/m ²
0,63	6,30	0,70	2,50
0,70	7,00	0,80	2,85
0,75	7,50	1,00	3,57
0,88	8,80		
1,00	10,00		

Aanbevolen maximale lengte: 12 m

SAB 58KD/945

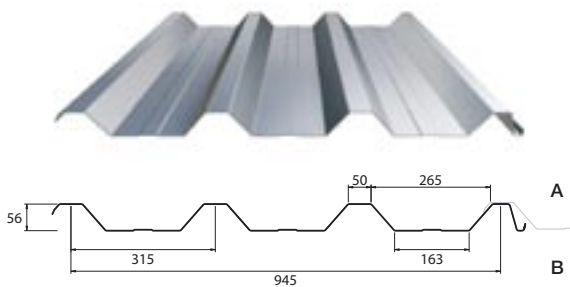

Staal		Aluminium	
mm	kg/m ²	mm	kg/m ²
0,63	6,54	0,70	2,59
0,70	7,27	0,80	2,96
0,75	7,78	1,00	3,70
0,88	9,13		
1,00	10,38		

Maximale lengte: 18 m

